



TRUWOOD PANEL SIDING

FEATURES/BENEFITS

Quality engineered surface and core:

TruWood Siding is designed specifically to eliminate splitting, cracking and checking. It is also free of knots, resulting in a more attractive finished project.

Pre-primed for improved weatherability:

TruWood Siding is primed to provide a consistent surface ready to accept paint. TruWood's industry leading coating technology ensures uniformly primed boards for added weather protection while providing an excellent surface for exterior topcoats.

Best protective packaging available:

TruWood protects your investment with premium packaging that reduces damage and provides for easy handling.

Trained field representatives: TruWood reps provide technical support and jobsite application training.

Pattern selection: Old Mill® textured rough-sawn cedar surfaces, and your choice of several grooving patterns, give you many design and style options to build more appealing projects.

30-year limited warranty:

TruWood Siding offers the best warranty in the industry and it's fully transferable. See complete warranty for details.

Availability: Field inventories are available through a convenient local distribution network to ensure siding is delivered where and when you need it.

Trim: Use matching reversible TruWood Trim to finish around windows, doors and corners.

Green matters:

- Recycled content is 3rd party certified by Scientific Certification Systems (SCS)
- No UF resin
- Maximum fiber utilization and recovery
- TruWood Sidings available with FSC certification

TruWood® SIDING

DESCRIPTION


TruWood 7/16" and 1/2" Panel Siding is engineered to provide a highly paintable, textured surface for the look of cedar without checks or cracks that can detract from the appearance of your project.

TruWood Siding combines competitive prices and high quality to set a new industry standard for value. Expert craftsmanship and proven performance make TruWood Siding an excellent choice for today's quality and value conscious builders.


USES

TruWood Siding is designed for use in residential single-family and multi-family housing and adds style to remodeling and light commercial projects. Whether you are a professional builder or a do-it-yourselfer, TruWood Siding delivers style and impact to all your outside building projects.


**FOR COMPLETE INSTALLATION INSTRUCTIONS,
MAINTENANCE AND WARRANTY INFORMATION,
GO TO WWW.COLLINSWOOD.COM**




1/2" Old Mill® 808 Striated Groove / 7/16" Sturdy Panel

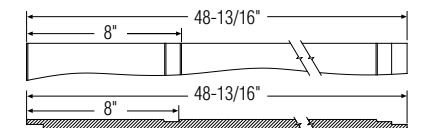

8" O.C. Channel Groove

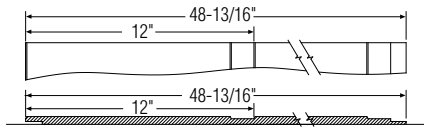


12" Reverse Board and Batten



Square Edge

Manufactured by
COLLINS PRODUCTS LLC
TRUWOOD SIDING & TRIM
6410 Hwy 66
Klamath Falls, OR 97601

Sales: **800.417.3674**
Warranty: **800.329.1219**
www.CollinsWood.com



Specifications:

TruWood Siding meets the requirements of the following codes and standards:
2006 International Residential Code (IRC)
International Building Code
Federal Manufactured Housing Standards
ICC ESR-2588
American National Standard ANSI-CPA 135.6 and other applicable codes and standards
California Wildland-Urban Interface (WUI) – must follow special WUI requirements
Cal. Prop 65 Warning: Use of this product may result in exposure to wood dust, known to the State of California to cause cancer.

 Member of The Composite Panel Association

Fire rating = Class C, R Value = 0.67 (hour) (Sq. Ft.) (Fahrenheit) per BTU
Racking, when installed in accordance with TruWood application instructions:
7/16" Panel Siding = 155 Shear Value. 1/2" Panel Siding = 202 Shear Value
The approximate weight: 1/2" Panel Siding = 2,070 Lbs./MSF
7/16" Panel Siding = 1,700 Lbs./MSF
TruWood Panel Siding is shipped 20 units per truckload or 60 units per railcar

Panel Size	Pc/ Unit	Sq. Ft./ Unit	Approx. Coverage Sq. Ft./ Unit	Approx. Sq. Ft. Needed To Cover 1,000 Sq. Ft. of Wall Area*	Approx. Weight Lbs./Unit
7/16" x 4' x 7'***	45	1,260	1,134	1,100	2,050
7/16" x 4' x 8'	45	1,440	1,296	1,100	2,400
7/16" x 4' x 9'***	45	1,620	1,458	1,100	2,650
1/2" x 4' x 8'	37	1,184	1,066	1,100	2,400

* Assumes a 10% waste factor for cutting and fitting. All grooved panels are shipped on the long edges and cut oversize to provide 48" net coverage when applied.

** **Limited availability**

Selection

Panel Size	Sizes	Surface Texture
Sturdy Panel 3/8" Groove 8" O.C.	7/16" x 4' x 8'	Old Mill®
	7/16" x 4' x 7'***	Old Mill®
	7/16" x 4' x 8'	Old Mill®
	7/16" x 4' x 9'***	Old Mill®
Reverse Board & Batten 12" O.C.	1/2" x 4' x 8'	Old Mill®
	7/16" x 4' x 8'	Old Mill®
3/8" Striated Groove 808 8" O.C.	1/2" x 4' x 8'	Old Mill®
Square Edge (Plain)	7/16" x 4' x 8'	Old Mill®

** **Limited availability**

Service

For more information on this, or other TruWood products, go to CollinsWood.com or please contact your nearest TruWood distributor. For locations, call **1.800.417.3674**.

Or write:
Collins Products LLC
TruWood Siding & Trim
6410 Hwy 66
Klamath Falls, Oregon 97601