



**TruWood**<sup>®</sup>  
SIDING

## TRUWOOD SELF-ALIGNING LAP SIDING

TruWood 1/2 in Lap Siding's self-aligning feature creates Tru ease of installation, Tru time reduction and Tru labor savings. TruWood Siding combines a competitive price point and high quality to set a new industry standard for value. With expert craftsmanship and proven performance, TruWood Siding is the Tru choice for today's discerning builders.


### FEATURES/BENEFITS

- Quality engineered surface and core
- 30-year limited warranty
- Pre-primed for improved weatherability
- 16 ft lengths
- Matching reversible TruWood Trim
- Installs 25-40% faster than cement or vinyl sidings
- Use for residential single-family and multi-family housing, remodeling and light commercial projects
- Ask us about our FSC<sup>®</sup> products



- Endures extreme weather conditions in the toughest climates
- Resists mildew, rot and termite damage
- Naturally-occurring additive safe for use around children and pets

SELF-ALIGNING  
1/2 in LAP SIDING

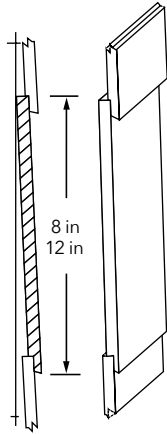

## SPECIFICATIONS:

Lap Size	Pc/ Unit	Pc/ Bundle	Bundles/ Unit	Sq. Ft./ Unit	Maximum Exposure in inches	Approx. Coverage Sq. Ft./ Unit	Sq. Ft. Needed To Cover 1,000 Sq. Ft. of Wall Area*	Approx. Weight Lbs./Unit
1/2 in x 8 in x 16 ft	210	5	42	2,240	7	1,862	1,200	4,550
1/2 in x 12 in x 16 ft	140	5	28	2,240	11	1,951	1,145	4,550

\*Allows for a 1 in overlap and assumes a 5% waste factor.

## Selection

Lap Size	Surface Texture
1/2 in x 8 in x 16 ft	Old Mill®
1/2 in x 12 in x 16 ft	Old Mill®

## TruWood Siding and Trim meet the requirements of the following:

2015 International Building Code  
2015 International Residential Code  
ICC ESR-2588  
Federal Manufactured Housing Standards  
American National Standard ANSI-CPA 135.6 - 2015  
California Wildland-Urban Interface (WUI)

**CAL. PROP 65 WARNING:** Use of this product may result in exposure to wood dust, known to the State of California to cause cancer.

Fire rating = Class C, R Value = 0.67 (hour) (Sq. Ft.) (Fahrenheit) per BTU  
The approximate weight: 1/2 in Lap Siding = 2,055 Lbs./MSF  
TruWood Sure Lock Sidings are shipped 10 units per truckload or 40 units per railcar

FOR YOUR NEAREST DISTRIBUTOR, COMPLETE INSTALLATION INSTRUCTIONS, MAINTENANCE, SERVICE AND WARRANTY INFORMATION, GO TO [TruWoodSiding.com](http://TruWoodSiding.com). FOR LOCATIONS, CALL **800.417.3674** OR EMAIL [truwood@collinsco.com](mailto:truwood@collinsco.com).

